



Exceeding The Limits To Always Get The Best



1200x3200MM



CONNECTING THE VALUE OF SLAB








CONTINUA+ is the most efficient, highest-productivity technology for the accurately managed manufacture of ceramic slabs and tiles, also producible with traditional bodies. The slabs are, in fact, formed without using a traditional press or mould, ensuring maximum flexibility in terms of size and thickness.




CONTINUA+ seamlessly integrates the powder forming phase and subsequent digital decoration. The key strengths of this exclusive process are high quality texturing and unrivalled surface shine.



PRODUCTFormats

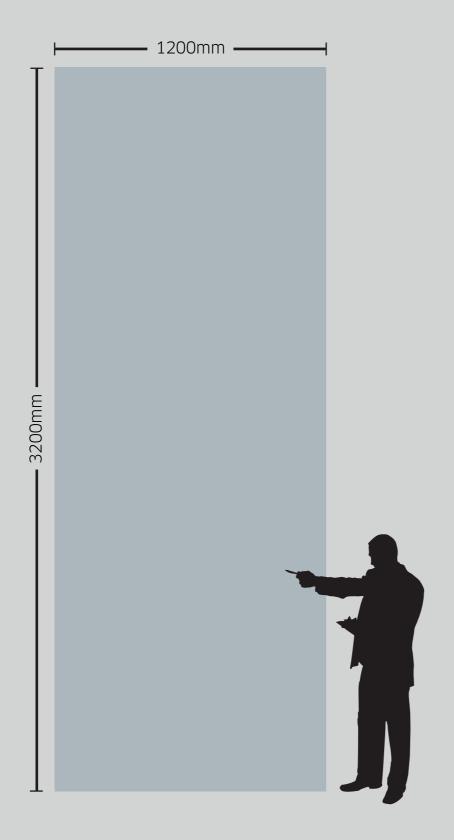



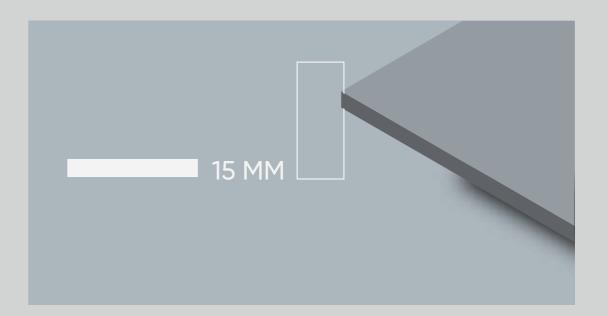

The thicknesses are one of the most important elements characterizing.

15 mm is set aside for the most demanding product applications such as kitchen countertops.







Double straight rounded edge

Straight squared edge

Rounded straight edge

Double straight squared edge


Half bullnoss

Rounded edge at 45°

Full bullnoss

Squared edge at 45°

Demi bullnoss



Micro bevel

Giving a nice trim to the edges of the tiles adds to its beauty.

As these tiles are of the good thickness of 15mm it is possible to shape its edges in different styles and create aesthetically rich countertops for your space.

JOINT POSSIBILITIES












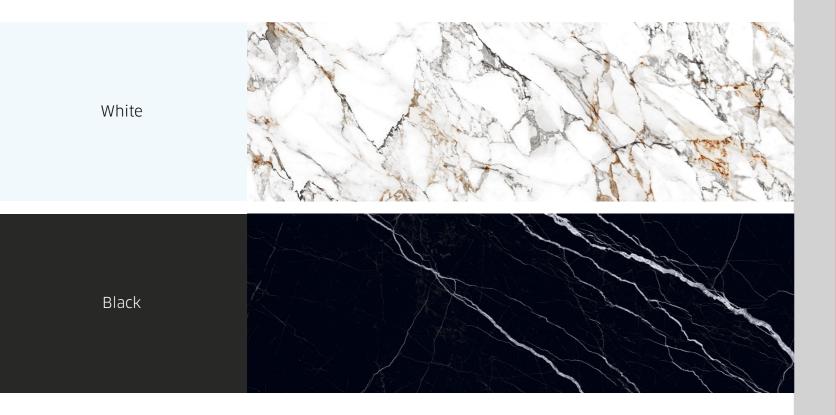

Our collections offer professional-grade performance while seamlessly blending the latest innovations with a premium design aesthetic that is crafted with authentic, high-quality materials.


The Functionality of The Residential Kitchen

for Today's Homeown

Leading Edge Design



PRODUCT Range

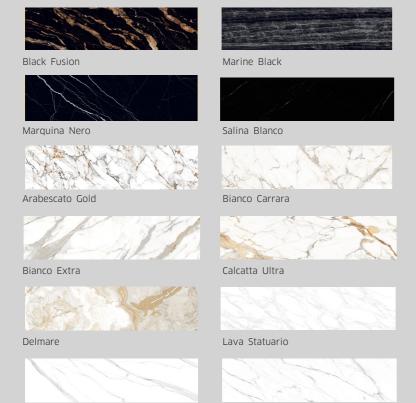

Statuario Unico



GLOSSY

Glossy is an optical property which indicates how well a surface reflects light in a specular (mirror-like) direction.





Statuario Pearl

APPLICATION Areas

LIGHTWEIGHT

WATERPROOF

RESISTANT TO SCRATCHES

RESISTANT TO HIGH TEMPERATURES

EASY TO CLEAN

RESISTANT TO BENDING

100% NATURAL

RECYCLABLE

HYGIENIC

RESISTANT TO UV RAYS

KITCHEN COUNTERTOP



DINING TABLE

LIVING ROOM

FURNITURE

STAIRCASE

OFFICE TABLE

DOOR \WINDOW

FRAME



 \bigoplus



















TABLE TOP



















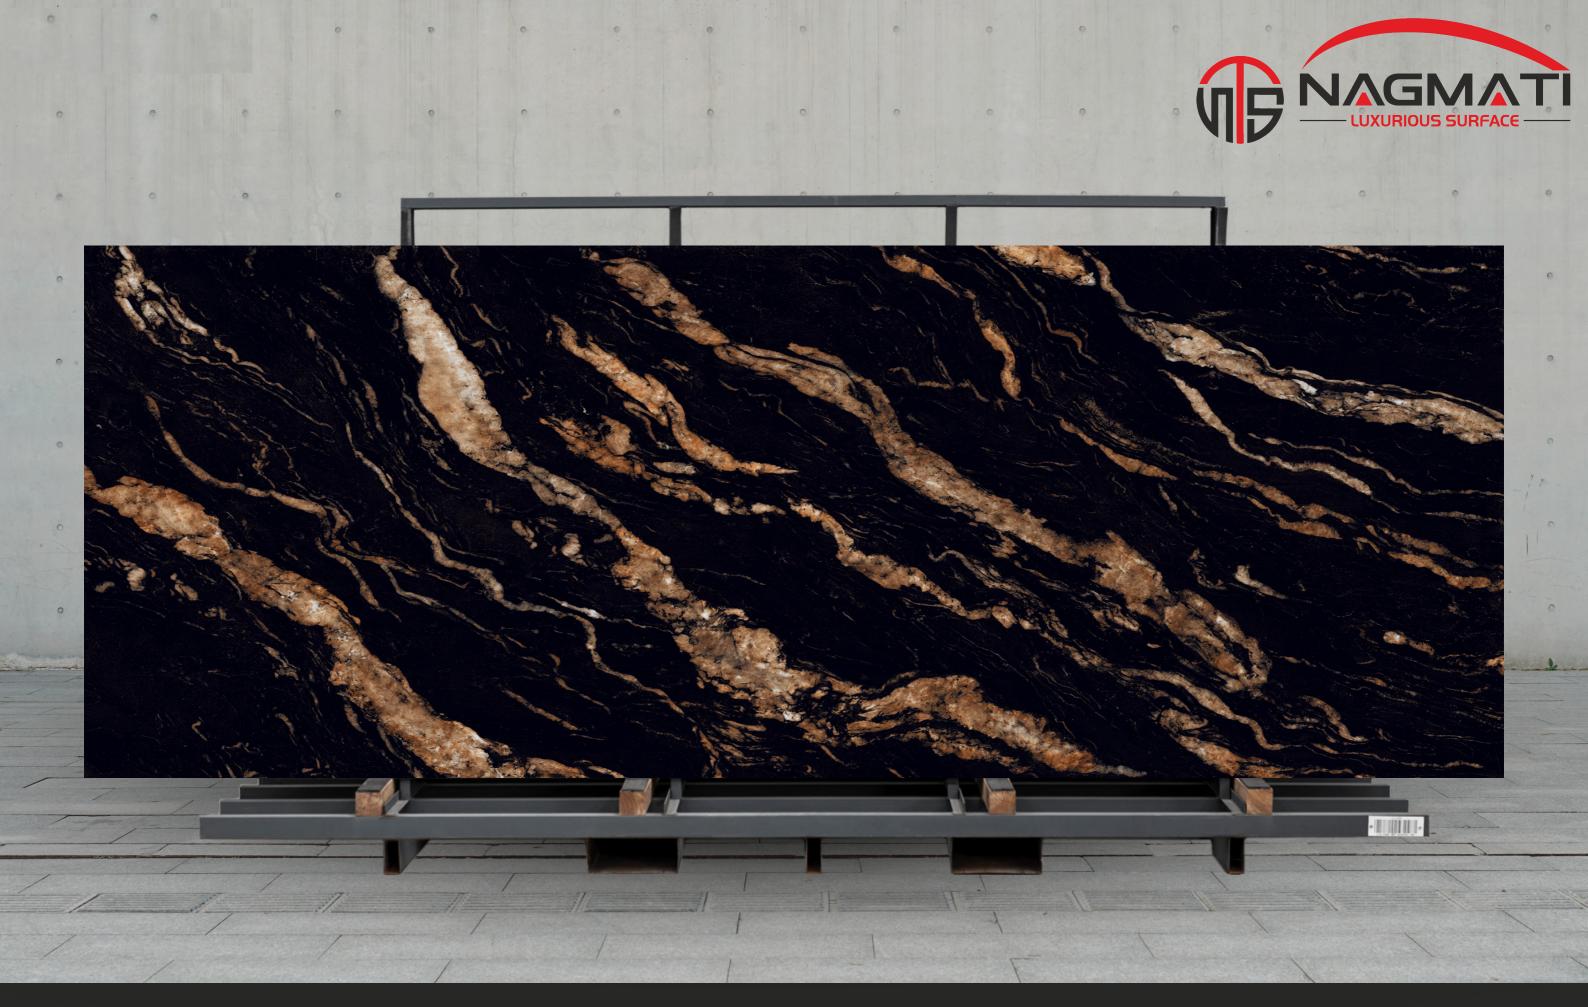

BLACK FUSION

BODY

BLACK BODY

FINISH GLOSSY


SIZE **1200**x**3200 MM**



MARINE BLACK

BODY
BLACK BODY

FINISH **GLOSSY** SIZE **1200**x**3200 MM**

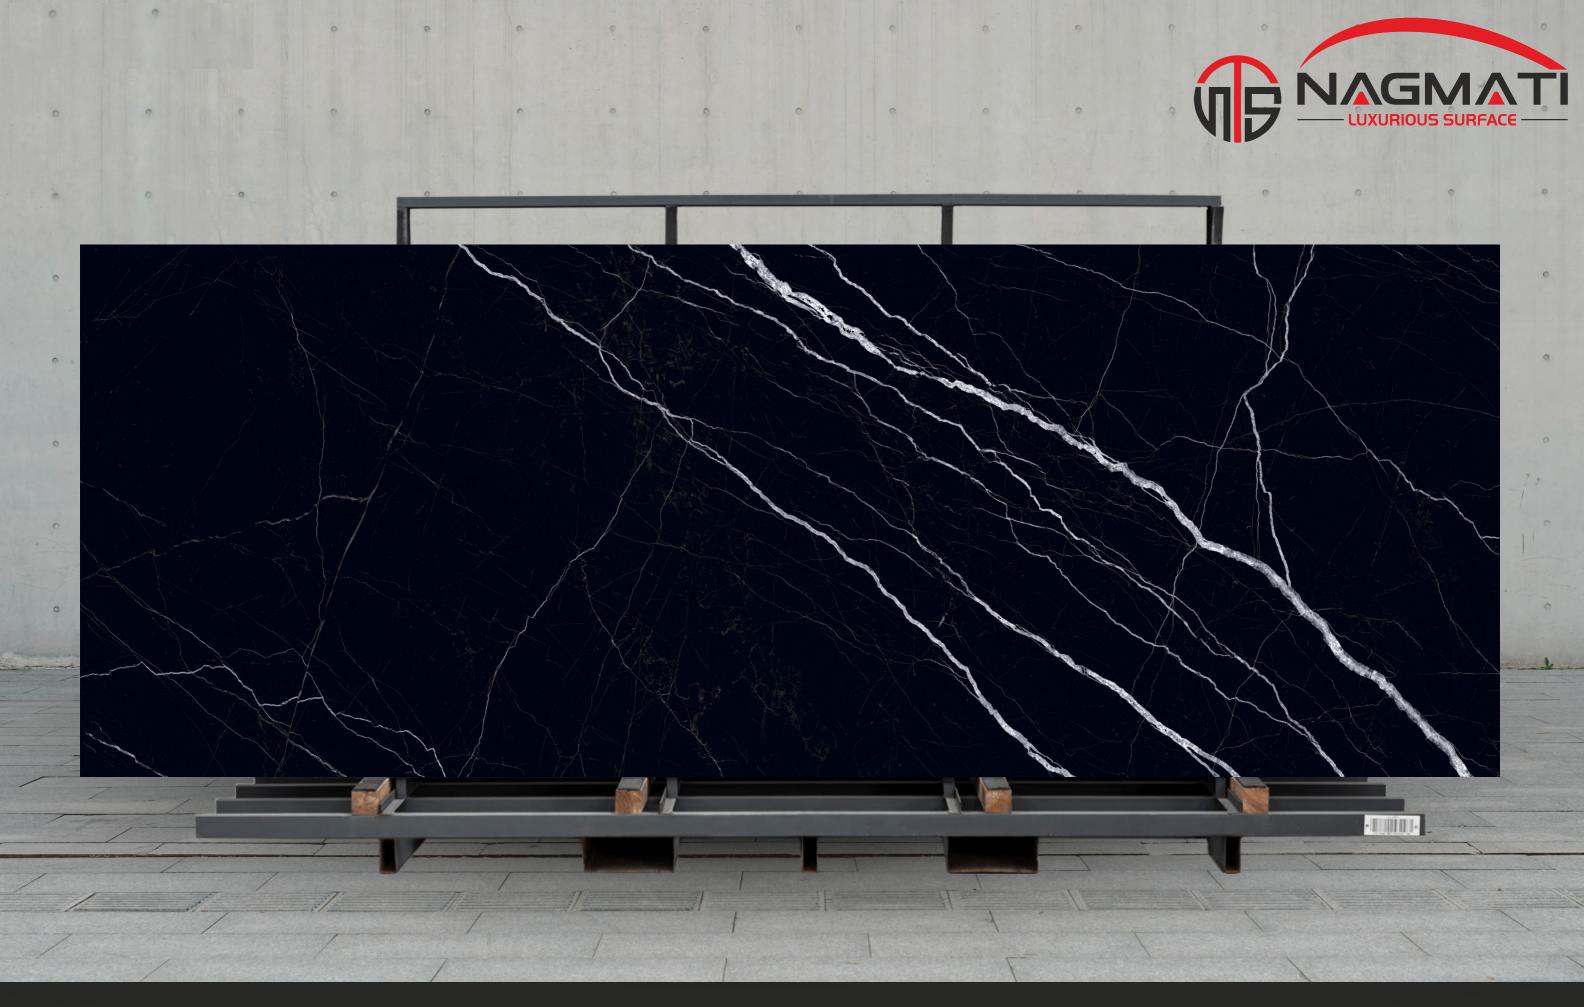

MARQUINA NERO

BODY BLACK BODY FINISH GLOSSY

SIZE **1200**x**3200 MM**




SALINA BLANCO

BODY BLACK BODY FINISH **GLOSSY**

SIZE **1200**x**3200 MM**





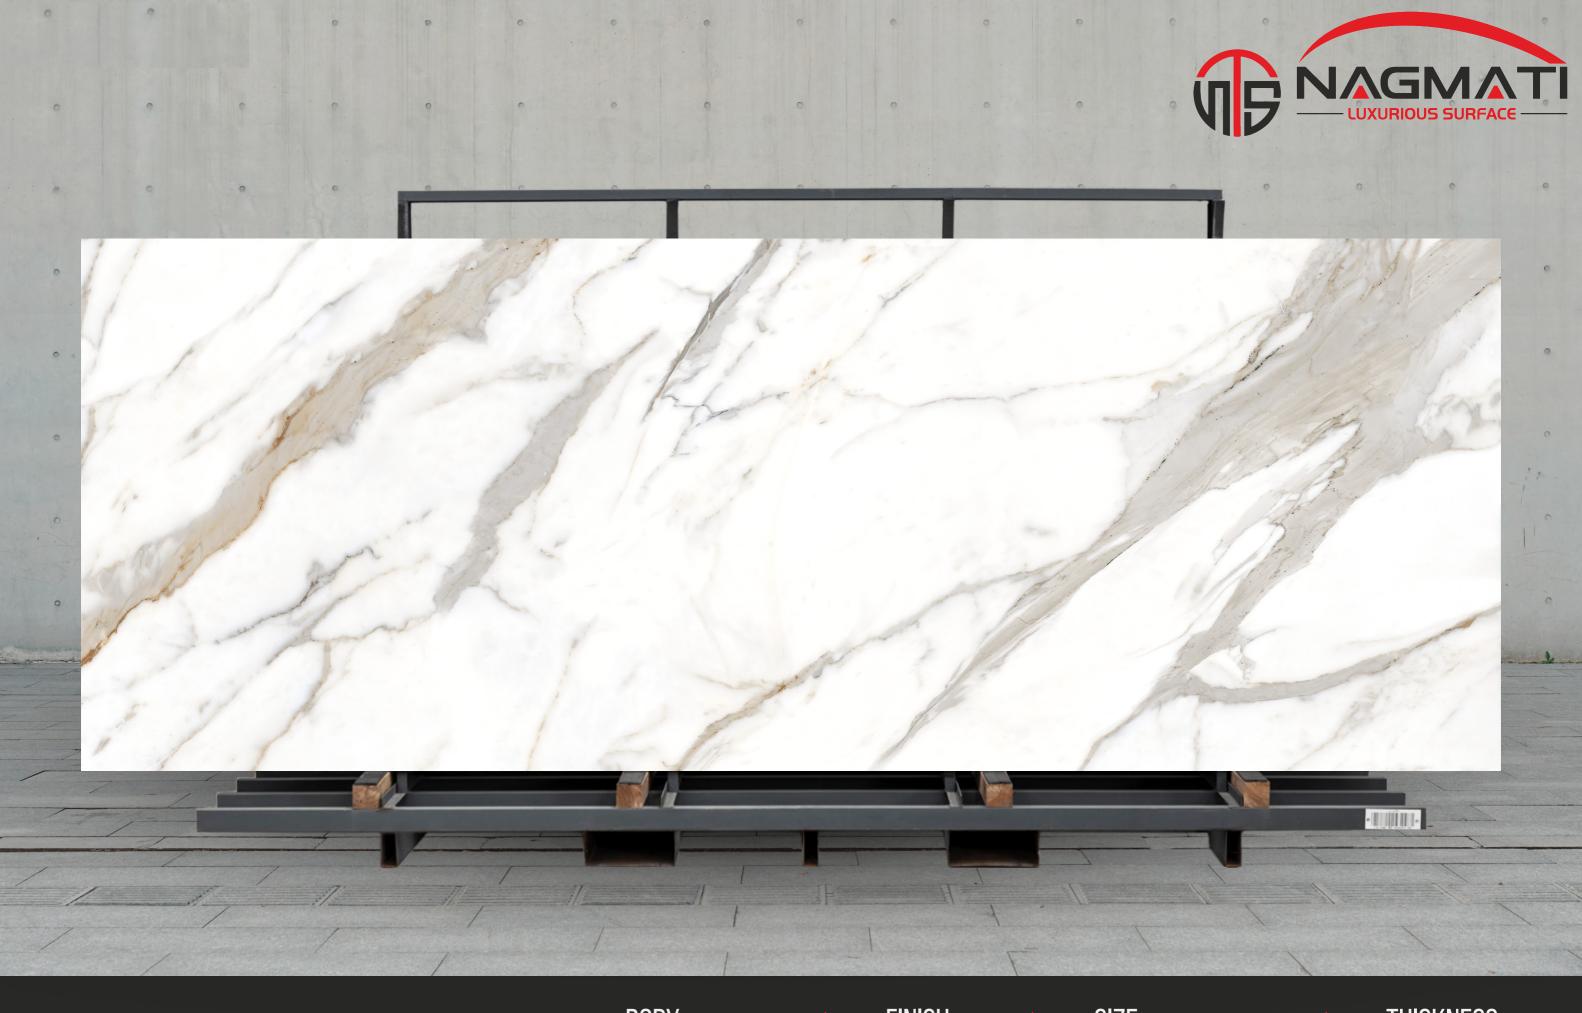






DELMARE

BODY WHITE BODY

FINISH **GLOSSY**

SIZE **1200**x**3200 MM**

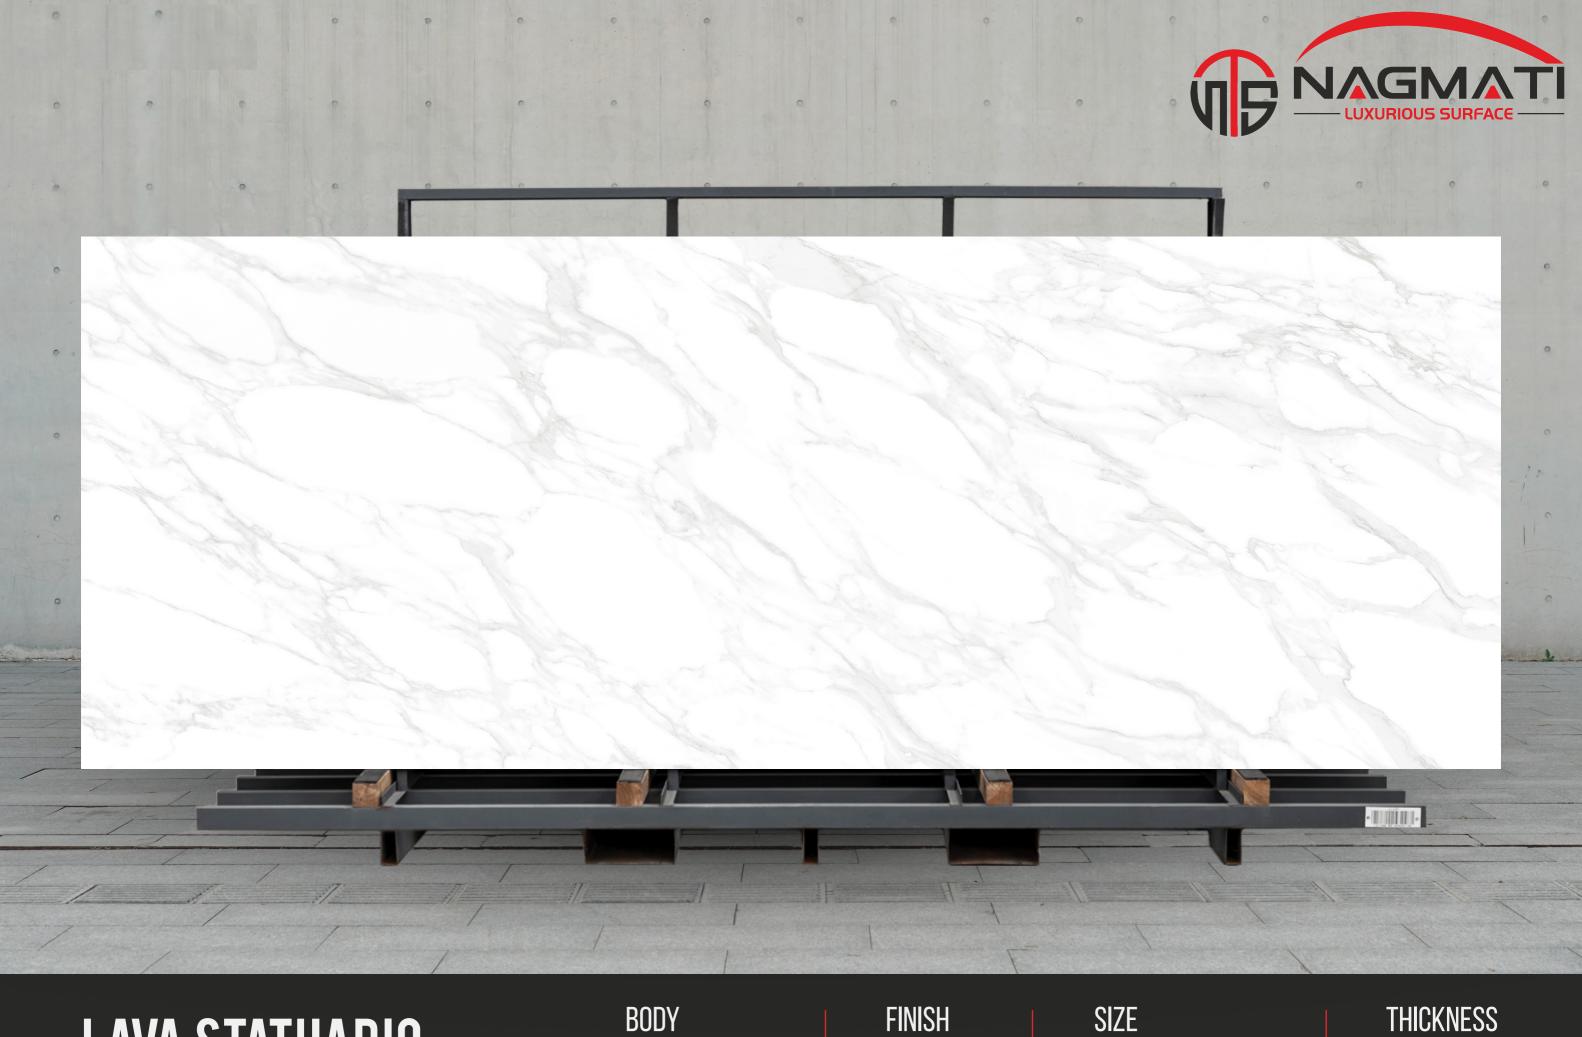


LAVA STATUARIO

BODY WHITE BODY

FINISH GLOSSY

SIZE **1200**x**3200 MM**

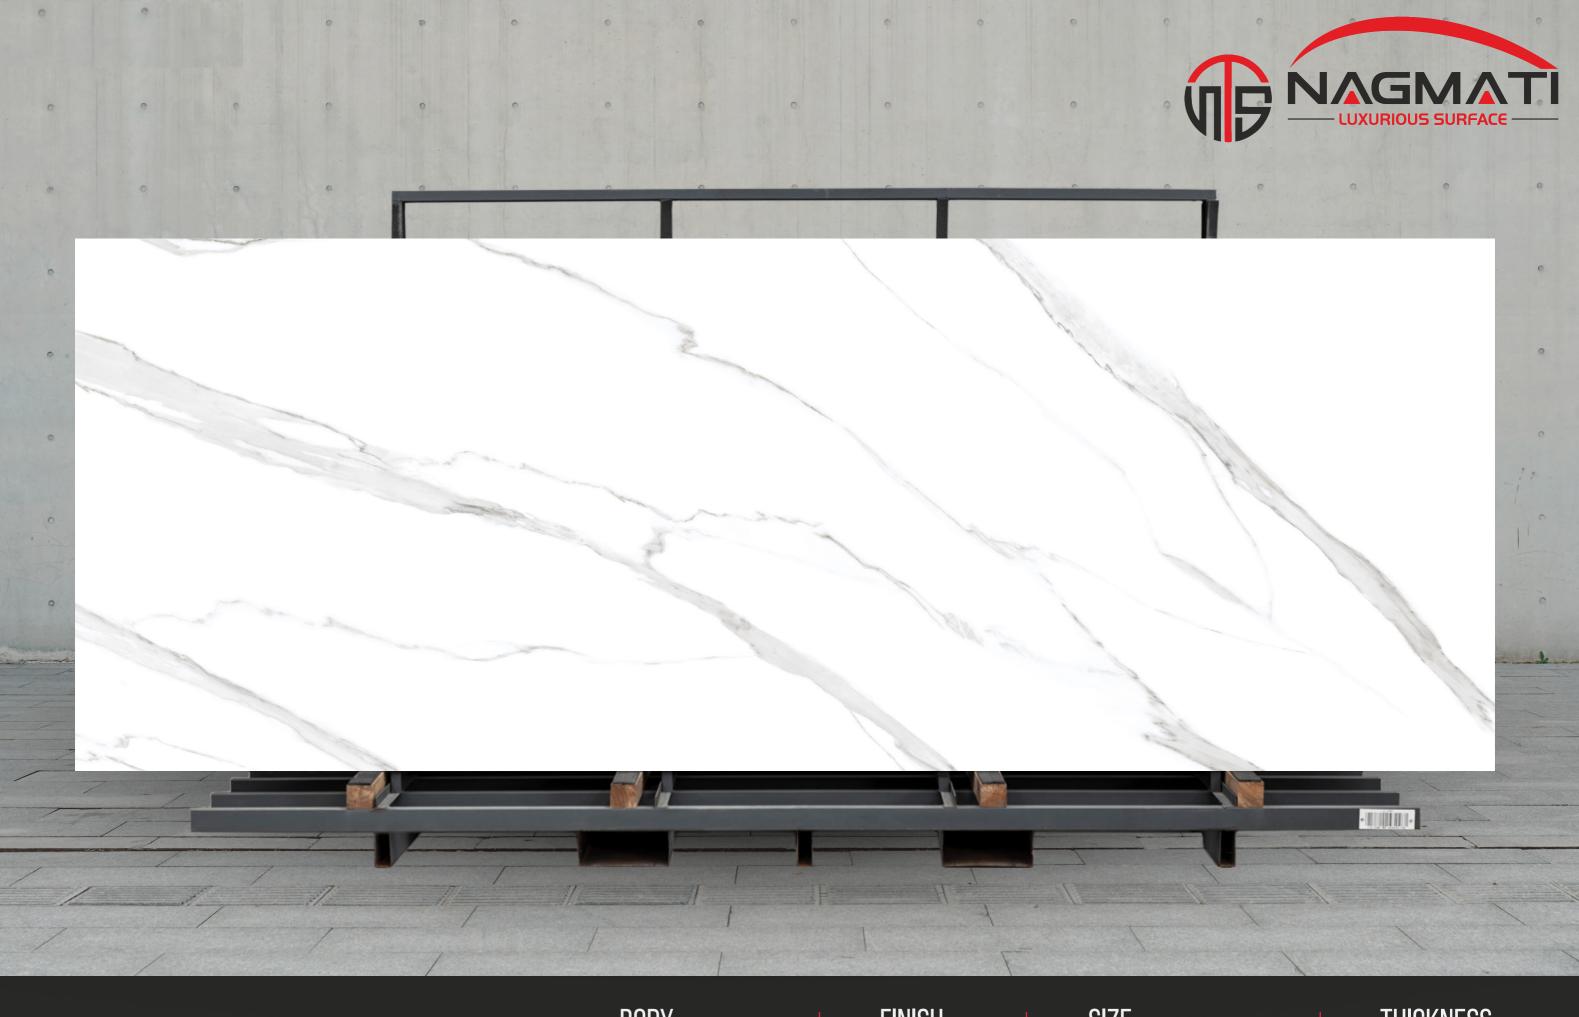


STATUARIO PEARL

BODY WHITE BODY

FINISH GLOSSY

SIZE **1200**x**3200 MM**

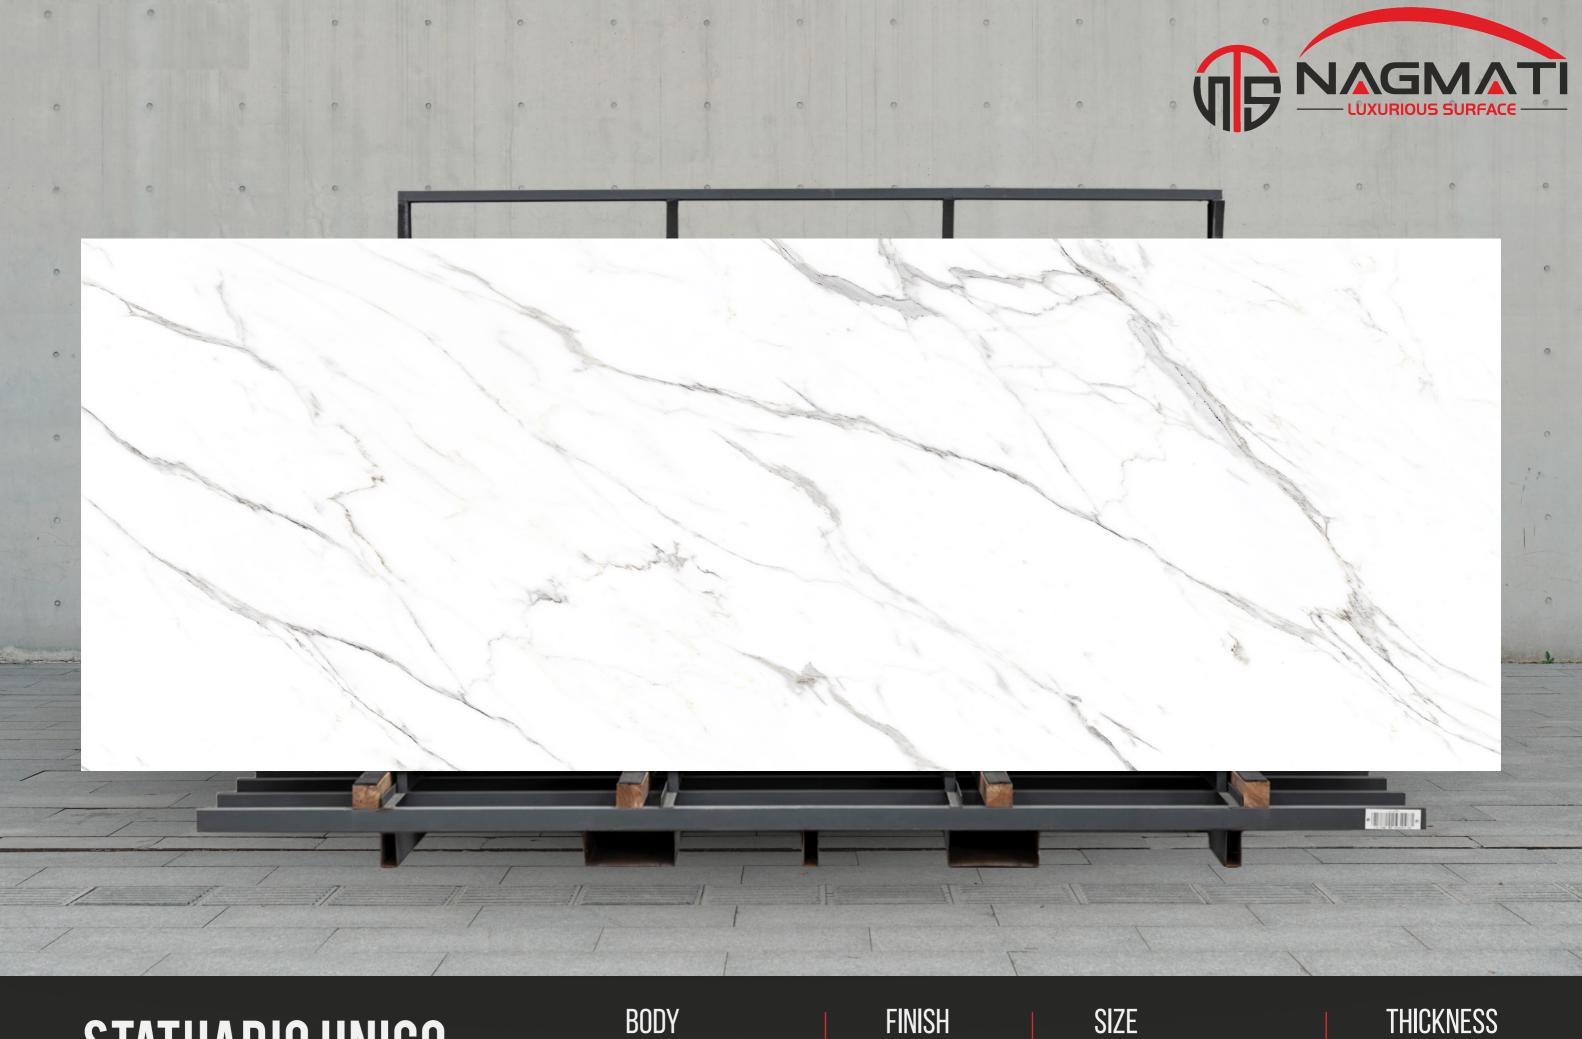



Cleaning & Maintenance

Our products are non porous (due to their high quality raw materials, stringent production parameters and state of the art technology), hence any dust or deposited waste cannot penetrate the surface.

For most cases only a damp cloth is sufficient for cleaning.

Regular cleaning highlights the aesthetic features of the surface and gives it exceptional shine.

For highly aggressive cleaning caused by some common food and substances follow the table below.

TYPE OF STAIN	CHEMICAL PRODUCT	EXAMPLE	
Grease	Alkaline - Solvent	Detergent	
Oil	Solvent	Ammonia, Backing Soda	
Ink	Oxidant - Solvent	Alcohol, Liquid Bleach, Nail Paint Remover	
Rust	Acid	Hydrochloric Acid, Vinegar, Red Harpic	
Lime	Acid	Descaling Reagent, Hydro Chloric Acid	
Cement	Acid	Hydro Chloric Acid	
Wine	Alkaline	Ammonia, Liquid Bleach	
Coffee	Alkaline - Solvent	Ammonia, Liquid Bleach	
Rubber	Solvent	Alcohol, Thinner	
Plaster	Acid	Hydro Chloric Acid	
Candle Wax	Solvent	Alcohol, Thinner	
lodine	Oxidant	Liquid Bleach	
Blood	Oxidant	Liquid Bleach	
Ice Cream	Alkaline	Liquid Bleach	

Note: It is recommended that any kind of stain needs to get clean immediately / as soon as possible.

Technical Specification

CHARACTERISTIC	STANDARD AS PER ISO13006:2018/ EN14411 Gr.BIa	MEAN VALUE OF	TEST METHOD
Regulatory Properties —————			
Deviation in Length and Width	± 0.30 % (±1.00mm)	± 0.10 %	ISO 10545-2
Deviation in Thickness	± 5.00 % (±0.50mm)	± 5.00 %	ISO 10545-2
Straightness in Side	± 0.30 % (±0.80mm)	± 0.10 %	ISO 10545-2
Rectangularity	± 0.30 % (±1.50mm)	± 0.10%	ISO 10545-2
Surface Flatness Central Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Edge Curvature	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Flatness Warpage	± 0.40 % (±1.80mm)	± 0.50 %	ISO 10545-2
Surface Quality	> 95% defects free	> 95% defects free	ISO 10545-2
Small Color Difference(for Plain Colour)	ΔE < 1.00	ΔE < 0.30	ISO 10545-16
Glossiness (Polished)	as per mfg.	Gloss Value> 90	Gloss Meter 60°
Glossiness (Matt)	as per mfg.	3 <gloss td="" value<7<=""><td>Gloss Meter 60°</td></gloss>	Gloss Meter 60°
Glossiness (Satin/Posh)	as per mfg.	7 <gloss td="" value<18<=""><td>Gloss Meter 60°</td></gloss>	Gloss Meter 60°
Structural Properties —			
Water absorption	≤ 0.50 %	≤ 0.060 %	ISO 10545-3
Bulk density	as per mfg.	Min. 2.28 g/cc	ISO 10545-3
Massive Mechanical Properties ————			
Modulus of rupture	Min. 35.0 N/mm ²	Min. 42.0 N/mm ²	ISO 10545-4
Breaking strength thickness <7.5	Min. 700.0 N	Min. 1000.0 N	ISO 10545-4
Breaking strength thickness ≥7.5	Min. 1300.0 N	Min. 1800.0 N	ISO 10545-4
Breaking strength thickness ≥(1755mm)	Min. 1300.0 N	Min. 7500.0 N	ISO 10545-4
Surface Mechanical Properties ————			
MOH'S hardness #	as per mfg.	Glossy Min. 4*/ Posh Min. 6	BS EN 15771
Surface abrasion resistance #	as per mfg.	Glossy Min. 2/ Posh Min. 3	ISO 10545-7
Deep abrasion resistance #	Max. 175mm	Max. 132mm	ISO 10545-6
Thermal Hydrometric Properties ————			
Moisture expansion	Max. 0.06%(0.6mm/m)	Max. 0.02mm/m	ISO 10545-10
Thermal expansion(COE) at 100°C	as per mfg.	Max. 6.0 x 1 0 6	ISO 10545-8
Thermal shock resistance	Min. 10 Cycle	Min. ¹ 0 Cycle	ISO 10545-9
Impact resistance(COR) #	Min. 0.55	Min. 0.55	ISO 10545-5
Frost resistance	as per mfg.	Frost Proof	ISO 10545-12
Chemical Properties —			
Resistance to staining glazed	Min. Class 3	Min. Class 4	ISO 10545-14
Resistance to household chemicals & swimming pool salts glazed	Min. Class GB	Min. Class GA	ISO 10545-13
Resistance to low concentrate acid and alkalis glazed	as per mfg.	Min. Class GLB**	ISO 10545-13
Resistance to high concentrate acid and alkalis glazed Safety Properties ————————————————————————————————————	as per mfg.	Min. Class GHB**	ISO 10545-13
Skid resistance(DCOF-DRY) ##	as per mfg.	Glossy PO($<^{12}$) / Posh \geq P ¹ (12 - 2 4)	BS 7976-2
Slip resistance(DCOF)(R value) ##	as per mfg.	R9 to R ¹³	DIN 51130
Fire resistance	as per mfg.	Fire Proof	N.A.

Packing Details

PRODUCT	SIZE	THICKNESS	TILES / BOX	COVERAGE AREA / BOX	WEIGHT (Kg)
Glossy	1200x3200mm	15mm	1pc	41.33 Sq ft	133 to 135

^{*} With Nano polished ** Except Hydrofluoric Acid & it's compound # Tiles Intended for use on floor